


AUDIO VIDEO RICERCA E LIVE
 SYSTEM SVILUPPO
 MP3 HOME QUALITA
 THEATER
 INFORMATICA COMUNICAZIONE
 NETWORK BROADCAST
 FLESSIBILITÀ CONNETTORI
 EVENTI MULTIVIDEO

CONCERTI ISOLAMENTO
 TASKERCABLES.COM



...a project further...

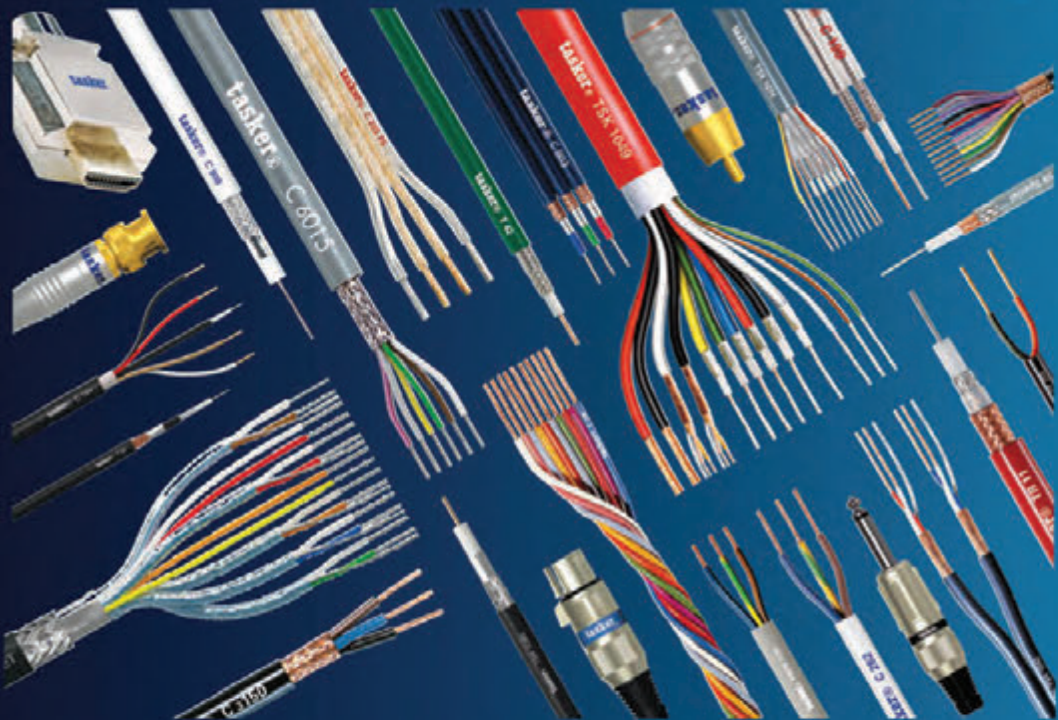

Produzioni speciali su richiesta!
 Tutto in pronta consegna!
 Special production on demand!
 Everything on stock!



www.tasker.it
 made in Italy

Audio

Cavo microfonico T32, 2x0,22 mm² FLUO extra flex in versione "pocket":

10 20 mt

FLUO Microphone cable T32, 2x0.22 mm² extra flex in "pocket" version:
Cable de micrófono FLUO T32, 2x0.22 mm² extra flex en versión "pocket":
FLUO T32 Mikrofonkabel, 2x0,22 mm² Extra Flex in der "Pocket" -Version:
Câble de microphone FLUO T32, 2x0.22 mm², extra flexible, version "Pocket":
Микрофонный кабель FLUO T32, 2x0,22 мм², очень гибкий в «карманной» версии:



tasker®



tasker®

...a project further...

NEW

CPR Certified Cables - The New Solution for Construction - LAN and Video Cables - B2ca and Cca Class



		C722 CPR B2ca	TSK 1079 CPR Cca
HOMOLOGATION:		B2ca - s1a - d0 - a1	Cca - s1a - d0 - a1
APPLICATION:		Fix Installation S.F./U.T.P. Cat.6 LAN	Fix Installation 3G-SDI over 90m
INNER CABLES	n° Cond.	8	1
NOMINAL SECTION	mm²	4x2x0,25	1x1,00
CONDUCTOR FORMATION	ø mm	1x0,57 CU Stiff wire OFC	1x1,13 CU Stiff wire OFC
CORE INSULATION	ø mm	1,15 Foam Skin PE	4,80 Gas Injected PEE
TOTAL SHIELDING	type and coverage	Al-PET - Al foil 100% + CS Braid 55%	Al-PET - Al foil 100% + CS Braid 75%
OUTER SHEATH	mm	7,50 orange L.S.Z.H. L.S.Z.H. HalogenFree FirestoP	6,80 black L.S.Z.H. L.S.Z.H. HalogenFree FirestoP
PACKAGING	m	100/300/500	100/300/500
CAPACITY	pF/m	46,00	52,00
CONDUCTOR RESISTANCE	Ω/Km	74,00	18,00
VELOCITY OF PROPAGATION	%	75,00	85,00
MIN. BENDING RADIUS	x O.D.	10	10
IMPEDANCE	Ω	100	75
OPERATIVE TEMPERATURE	°C	-30/+70	-30/+70
Standards:		RoHS2 2011/65/UE and 2015/863UE - EN50575 - 305/2011 UE	



Connectors



NE8MX6
max. ø 9,5 mm.



NBNC75BTU11
max. ø 7,3 mm.

Products description

Tasker ha ampliato la sua ricca gamma di cavi CPR inserendo due nuovi prodotti omologati per le classi di medio ed elevato rischio incendio. Si tratta di un cavo LAN S.F./U.T.P. di Cat.6 e di un cavo Coassiale HD SDI per applicazioni a 3G con guaina in LSZH speciale. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarge his range of CPR certified cables by introducing two new products for medium and high fire risk. We are talking about a LAN cable S.F./U.T.P. Cat.6 and a coaxial one HD SDI for 3G applications and special LSZH sheath. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.


tasker®

...a project further...

NEW

CPR Certified Cables - The New Solution for Construction - Microphone and DMX Cables - Cca Class

		C128 CPR Cca	TSK1038 CPR Cca
HOMOLOGATION:		Cca-s1a-a0-a1	Cca-s1a-a0-a1
APPLICATION:		Audio Fix Installation	DMX and Light Fix Installation
INNER CABLES	n° Cond.	2	2
NOMINAL SECTION	mm²	2x0,35	2x0,35
CONDUCTOR FORMATION	ø mm	19x0,16 CU+CS OFC	19x0,16 CS OFC
CORE INSULATION	ø mm	1,70 PE	1,70 PE
SHIELDING	type and coverage	CS Braid 85%	CS Braid 85%
OUTER SHEATH	mm	6,10 L.S.Z.H. LSZH HalogenFree FirestoP	6,10 L.S.Z.H. LSZH HalogenFree FirestoP
PACKAGING	m	100/300/500	100/300/500
PAIR CAPACITY	pF/m	65,00	46,00
CAPACITY core/shield	pF/m	92,00	92,00
CONDUCTOR RESISTANCE	Ω/Km	59,00	59,00
MAX RATED VOLTAGE	V.	49	49
IMPEDANCE	Ω	80	110
OPERATIVE TEMPERATURE	°C	-30/+70	-30/+70
Standards:		RoHS2 2011/65/UE and 2015/863UE - 305/2011 UE	



Products description

Tasker ha ampliato la sua ricca gamma di cavi CPR omologando un cavo microfonico e un DMX per la classe di rischio medio Cca s1a-d0-a1. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarged his range of CPR certified cables with the homologation of one microphone and one DMX Cable for medium risk class Cca s1a-d0-a1. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.


tasker®

...a project further...

NEW

CPR Certified Cables - The New Solution for Construction Loudspeakers Cables - Cca Class

		TSK 401 CPR Cca	TSK 402 CPR Cca	TSK 403 CPR Cca
HOMOLOGATION:		Cca - S1a - d0 - a1	Cca - S1a - d0 - a1	Cca - S1a - d0 - a1
APPLICATION:		Loudspeaker Cable	Loudspeaker Cable	Loudspeaker Cable
INNER CABLE	n° Cond.	2	2	2
NOMINAL SECTION	mm²	2x1,00	2x1,50	2x2,50
CONDUCTOR FORMATION	mm	32x0,19 OFC CU	28x0,25 OFC CU	48x0,25 OFC CU
CORE INSULATION	ø mm	2,50 Silicon Rubber	2,80 Silicon Rubber	3,40 Silicon Rubber
INSULATION COLOUR		1 Cond. Black and 1 Red	1 Cond. Black and 1 Red	1 Cond. Black and 1 Red
SHEATH	type ø mm	LSZH, FirestoP, HalogenFree 7,10	LSZH, FirestoP, HalogenFree 7,80	LSZH, FirestoP, HalogenFree 8,90
SHEATH COLOR		Black	Black	Black
PACKAGING	m	100/300/500	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	19,50	13,30	7,98
CAPACITY	pF/m	60	60	60
MAX PULL STRENGTH	N Kg	100 10	150 15	250 25
IMPEDANCE	Ω	110	110	110
MIN. BENDING RADIUS	Outer ø	10	10	10
MAX RATED VOLTAGE	U ₀ /U V.	100	100	100
OPERATIVE TEMPERATURE	°C	-30/+70	-30/+70	-30/+70
Standards:		RoHS2 2011/65/UE - 305/2011 UE		

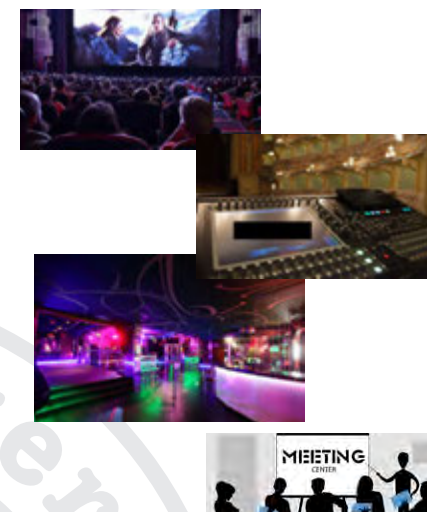

Products description

Tasker ha ampliato la sua ricca gamma di cavi CPR omologando tre cavi cassa per la classe di rischio medio Cca s1a-d0-a1. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarge his range of CPR certified cables with the homologation of three loudspeaker cables for medium risk class Cca s1a-d0-a1. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.

tasker®

...a project further...

NEW

CPR Certified Cables - The New Solution for Construction EVAC PH120 - Cca Class



		TSK 201	TSK 202	TSK 203
HOMOLOGATION:		Cca - S1a - d0 - a1	Cca - S1a - d0 - a1	Cca - S1a - d0 - a1
APPLICATION:		Voice Evacuation	Voice Evacuation	Voice Evacuation
INNER CABLE	n° Cond.	2	2	2
NOMINAL SECTION	mm²	2x1,00	2x1,50	2x2,50
CONDUCTOR FORMATION	mm	32x0,19 OFC CU	28x0,25 OFC CU	48x0,25 OFC CU
CORE INSULATION	ø mm	2,50 Silicon Rubber	2,80 Silicon Rubber	3,40 Silicon Rubber
INSULATION COLOUR		1 Cond. Black and 1 Red	1 Cond. Black and 1 Red	1 Cond. Black and 1 Red
SHEATH	type ø mm	LSZH FirestoP HalogenFree 7,10	LSZH FirestoP HalogenFree 7,80	LSZH FirestoP HalogenFree 8,90
SHEATH COLOR		Violet	Violet	Violet
PACKAGING	m	100/300/500	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	19,50	13,30	7,98
CAPACITY	pF/m	60	60	60
MAX PULL STRENGTH	N Kg	100 10	150 15	250 25
IMPEDANCE	Ω	110	110	110
MIN. BENDING RADIUS	Outer ø	10	10	10
MAX RATED VOLTAGE	U ₀ /U V.	100/100	100/100	100/100
OPERATIVE TEMPERATURE	°C	-30/+70	-30/+70	-30/+70
Standards:		RoHS2 2011/65/UE - EN50200 (PH120) - CEI 20-105 V1 - 305/2011 UE		



Products description

Tasker ha ampliato la sua ricca gamma di cavi CPR omologando anche i cavi EVAC e rilevamento incendio per la classe di rischio medio. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarge his range of CPR certified cables with the homologation of EVAC and Fire Detection cable for medium risk class. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.

tasker®

...a project further...

NEW

CPR Certified Cables - The New Solution for Construction Fire Detection and Signal Trasmission PH120 - Cca Class



		TSK 301	TSK 302	TSK 303
HOMOLOGATION:		Cca - S1a - d0 - a1	Cca - S1a - d0 - a1	Cca - S1a - d0 - a1
APPLICATION:		Fire Detection and Signal Trasmission	Fire Detection and Signal Trasmission	Fire Detection and Signal Trasmission
INNER CABLE	n° Cond.	2	2	2
NOMINAL SECTION	mm²	2x1,00	2x1,50	2x2,50
CONDUCTOR FORMATION	mm	32x0,19 OFC CU	28x0,25 OFC CU	48x0,25 OFC CU
INSULATION	ø mm	2,50 Silicon Rubber	2,80 Silicon Rubber	3,40 Silicon Rubber
INSULATION COLOUR		1 Cond. Black and 1 Red	1 Cond. Black and 1 Red	1 Cond. Black and 1 Red
SHIELDING	type and coverage	metallic Foil Tape 100% + tinned copper Drain Wire	metallic Foil Tape 100% + tinned copper Drain Wire	metallic Foil Tape 100% + tinned copper Drain Wire
SHEATH	type ø mm	<u>LSZH</u> FirestoP HalogenFree 7,10	<u>LSZH</u> FirestoP HalogenFree 7,80	<u>LSZH</u> FirestoP HalogenFree 8,90
SHEATH COLOR		Red	Red	Red
PACKAGING	m	100/300/500	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	19,50	13,30	7,98
MAX PULL STRENGTH	N Kg	100 10	150 15	250 25
MIN. BENDING RADIUS	Outer ø	10	10	10
MAX RATED VOLTAGE	U ₀ /U V.	100	100	100
OPERATIVE TEMPERATURE	°C	-30/+70	-30/+70	-30/+70
Standards:		RoHS2 2011/65/UE - EN50200 (PH120) - CEI 20-105 V1 - 305/2011 UE		



Products description

Tasker ha ampliato la sua ricca gamma di cavi CPR omologando anche i cavi EVAC e rilevamento incendio per la classe di rischio medio. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarge his range of CPR certified cables with the homologation of EVAC and Fire Detection cable for medium risk class. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.



tasker®

trade mark of MILAN S.r.l. a socio unico
Viale Europa, 74 20090 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158 Fax. +39 02 9039.4551

www.tasker.it

tasker®

...a project further...

NEW

CPR Certified Cables - The New Solution for Costruction - Eca Class

		C128 CPR	RG59 CPR	TSK108 CPR	C1100 CPR	C8035 CPR
HOMOLOGATION:		Eca	Eca	Eca	Eca	Eca
APPLICATION:		Long Distance Audio	Standard Video	Speakers	Electronics	Data Transmission
INNER CABLES	n° Cond.	2	1	2	1	8
NOMINAL SECTION	mm²	2x0,35	1x0,26	2x8,00	1x1,00	8x0,35
CONDUCTOR FORMATION	ø mm	11x0,20 CU+CS OFC	1x0,58 CW	112x0,30 CU OFC	32x0,20 CU OFC	11x0,20 CU OFC
CORE INSULATION	ø mm	1,70 Compact PE	3,70 Compact PE	5,70 PE	2,50 PVC Flame Retardant	1,60 PVC Flame Retardant
SHIELDING	type and coverage	CS Braid 85%	CU Braid 95%		CU Braid 85%	CU Braid 85%
OUTER SHEATH	mm	6,10 FirestoP Special Flame Retardant PVC	6,20 FirestoP Special Flame Retardant PVC	14,40 FirestoP Special Flame Retardant Tubular PVC	4,40 FirestoP Special Flame Retardant PVC	7,80 FirestoP Special Flame Retardant PVC
PACKAGING	m	100/300/500	100/300/500	100/300/500	100/300/500	100/300/500
PAIR CAPACITY	pF/m	55,00				110
CAPACITY core/shield	pF/m	92,00	67,00		280,00	200
CONDUCTOR RESISTANCE	Ω/Km	58,00	154,00	2,39	18,80	58
MAX RATED VOLTAGE	V.	49	2000	49	49	49
IMPEDANCE	Ω		75			
OPERATIVE TEMPERATURE	°C	-20/+70	-20/+70	-20/+70	-20/+70	-20/+70
Standards:		RoHS2 2011/65/UE and 2015/863UE - EN50575 - 305/2011 UE				



Products description

Prima gamma di prodotti **Tasker** omologati CPR per la classe di rischio bassa Eca. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

First range of CPR homologated **Tasker** cables for low risk class Eca. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.



tasker®

...a project further...



NEW

Battery Jumper Cables - 2x16 - 2x25 - 2x35 mm²

** Production on demand available also Red/Blue



		** C221		** C222		** C223	
APPLICATION:		Power Charge		Power Charge		Power Charge	
INNER CABLE	n° Cond.	2		2		2	
NOMINAL SECTION	mm²	2x16,00		2x25,00		2x35,00	
CONDUCTOR FORMATION	mm	448x0,20 Multiwire in red copper		696x0,20 Multiwire in red copper		976x0,20 Multiwire in red copper	
INSULATION	ø mm	7,00 Special PVC		8,60 Special PVC		9,70 Special PVC	
SHEATH	type	Transparent second sheath in Special PVC		Transparent second sheath in Special PVC		Transparent second sheath in Special PVC	
	ø mm	8,90x19,00		10,80x22,80		12,30x26,00	
PACKAGING	m hank	50		50		50	
MARKING	m²	16 CE		25 CE		35 CE	
CONDUCTOR RESISTANCE	Ω/Km	1,21		0,78		0,55	
MIN. BENDING RADIUS		114 mm Fix Installation 57 mm Mobile Installation		137 mm Fix Installation 69 mm Mobile Installation		156 mm Fix Installation 78 mm Mobile Installation	
MAX RATED VOLTAGE	U ₀ /U V.	450 Vac 750 Vdc		450 Vac 750 Vdc		450 Vac 750 Vdc	
TEST VOLTAGE	V	2500 V/15'		2500 V/15'		2500 V/15'	
OPERATIVE TEMPERATURE	°C	-40/+85 Fix Installation -25/+85 Mobile Installation		-40/+85 Fix Installation -25/+85 Mobile Installation		-40/+85 Fix Installation -25/+85 Mobile Installation	
Standards:		RoHS2 2015/863/UE					

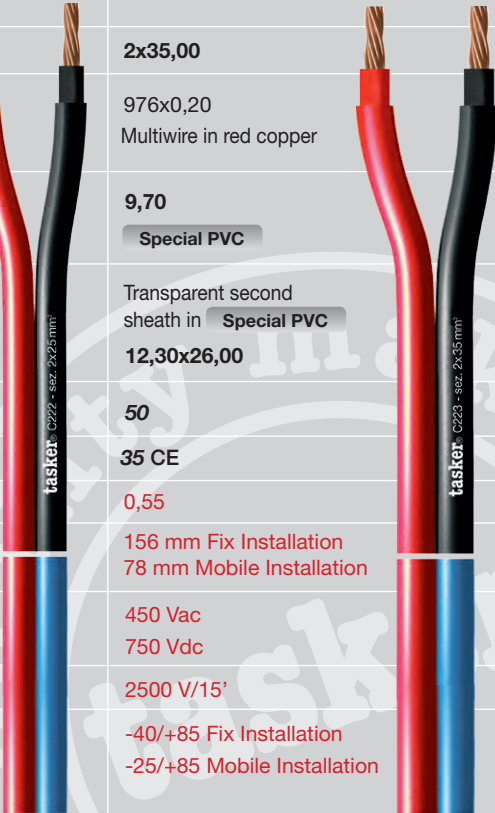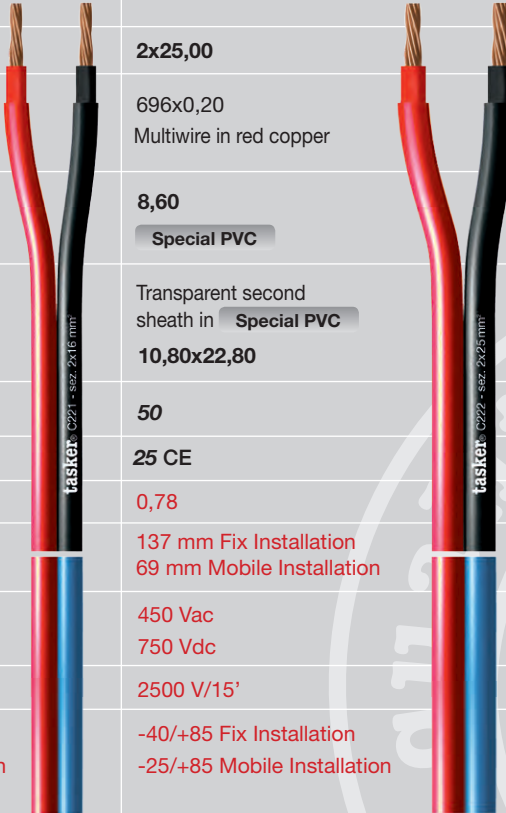



Products description

Tasker ha ampliato la sua ricca gamma di piattine divisibili inserendo una nuova linea di prodotti ideale per realizzare i cavi di ricarica delle batterie per gli autoveicoli. Questi cavi sono realizzati con le più moderne materie prime e tecniche costruttive in modo da poter garantire i più elevati standard di sicurezza sul mercato senza comprometterne la flessibilità.

Tasker has enlarged his already wide range of flat divisible cables by inserting some new ones, perfect to realize auto vehicles power charge cables. These cables are realized with the most advanced raw materials and technical constructions to be able to guarantee the highest security standards without compromising the flexibility at all.



tasker®

...a project further...

NEW

New Sections of Speaker Cables - T Series

		T19	T28	T29	T35	T37
APPLICATION:		Mobile Use	Mobile Use	Mobile Use	Mobile Use	Mobile Use
INNER CABLES	<i>n° Cond.</i>	2	2	2	4	8
NOMINAL SECTION	mm²	2x0,75 (2x19 AWG)	2x6,00 (2x9 AWG)	2x8,00 (2x8 AWG)	4x4,00 (4x11 AWG)	8x2,50 (8x13 AWG)
CONDUCTOR FORMATION	mm	24x0,20 OFC	84x0,30 OFC	112x0,30 OFC	82x0,25 OFC	51x0,25 OFC
INSULATION	ø mm	2,10 PVC	5,00 PVC	5,70 PVC	3,70 PVC	3,20 PVC
INSULATION COLORS		1 Black and 1 Red	1 Black and 1 Red	1 Black and 1 Red	Black, Red, Green, Blue	Black, Red, Green, Blue, Yellow, Grey, Brown, Orange
SHEATH	ø mm	6,0 PVC Flame Retardant FirestoP	12,40 PVC Flame Retardant FirestoP	14,40 PVC Flame Retardant FirestoP	12,00 PVC Flame Retardant FirestoP	12,80 PVC Flame Retardant FirestoP
SHEATH COLOR		Black	Black	Black	Black	Black
PACKAGING	m	100/300/500	100/300/500	100/300/500	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	21,93	2,75	2,39	4,31	6,41
MAX RATED VOLTAGE	V.	49	49	49	49	49
OPERATIVE TEMPERATURE	°C	-20/+70	-20/+70	-20/+70	-20/+70	-20/+70
Standards:		RoHS2 2011/65/UE and 2015/863UE				



Products description

Tasker ha ampliato la sua gamma di cavi cassa seguendo le principali richieste di mercato. Sono stati inseriti nuovi cavi cassa bipolari singola guaina nelle sezioni da 0,75, 6 e 8 mm che offrono un'ottima flessibilità e maneggevolezza senza trascurare la purezza del suono garantita dalla formazione in **rame puro OFC**. Completano la nuova serie le versioni multipolari da 4 e 8 conduttori.

*Tasker has enlarged its range of cables following the main market demands. The new single sheath bipolar speaker cables with section of 0.75, 6 and 8 mm offer excellent flexibility and manageability without compromising the purity of the sound guaranteed by **pure OFC copper**. The new series includes multipolar versions with 4 and 8 conductors.*



tasker®

...a project further...

NEW


Special Speakers and DMX Cables

		TSK1117	TSK1118	C282 Super	C862
APPLICATION:		Interference Protection	Interference Protection	Speakers Arrey	DMX Lights
INNER CABLES	n° Cond.	2	2	8	4
NOMINAL SECTION	mm²	2x4,00	2x6,00	8x4,00	2x2x0,35
CONDUCTOR FORMATION	mm	128x0,20 OFC	122x0,25 OFC	128x0,20 CU OFC	19x0,16 CS OFC
INSULATION	ø mm	4,20 PE	5,00 PE	3,80 PVC HT105* Grouped around a central filler PE	1,52 FOAM PE
INSULATION COLORS		1 Black and 1 Red		Black and Numbered	Red, Green and White/Black
SHIELDING	type and coverage	Red Copper Braid 85% OFC			Aluminium foil tape 100% + CS Braid 85%
SHEATH	ø mm	11,00 PVC Flame Retardant	13,20 FirestoP	18,00 PVC	7,50 PUR OUTDOOR USE
SHEATH COLOR		Black		Black	Black
PACKAGING	m	100/300/500		100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	4,31	2,75	5,74	59,40
MAX RATED VOLTAGE	V.	49		49	49
IMPEDENCE	Ω				110
OPERATIVE TEMPERATURE	°C	-20/+70		-15/+70	-15/+80
Standards:		RoHS2 2011/65/UE and 2015/863UE			

Products description

Tasker ha ampliato la sua gamma di cavi cassa e DMX seguendo le principali richieste di mercato. Sono state aggiunte due nuove sezioni di cavi cassa schermati di sezione 4 e 6 mm che estendono la gamma dei prodotti della stessa famiglia già esistenti con sezioni da 1, 1.5 e 2.5 mm. Questi prodotti garantiscono un'ottima protezione dalla interferenza grazie a una fitta schermatura a treccia anch'essa in rame puro. Il C282 Super è la nuova versione ad alta resistenza del C282, grazie alla sua costruzione a corona è particolarmente adatto alle applicazioni mobili anche continue. Il C862 è il più avanzato cavo DMX della tasker, presenta una doppia coppia da 110 ohm, schermatura a treccia, elementi aramidici di tenuta e guaina in poliuretano per esterno. Si tratta di cavo adatto alle più svariate applicazioni operative, sia INDOOR che OUTDOOR.

Tasker has enlarged its range of speakers and DMX cables following the main market demands. Two new sections of shielded speaker cables of section 4 and 6 mm that extend the range of the existing family products with sections of 1, 1.5 and 2.5 mm. These products guarantee excellent protection against interferences thanks to a dense braid shielding made of pure copper too. The C282 Super is the new high-strength version of the C282, thanks to its crown construction is particularly suitable for mobile applications also continuous. The C862 is the most advance DMX cable of the tasker range, it features a 110 ohm double pair, braided shielding, aramidic strength elements and the outer polyurethane sheath. It is a cable suitable for the most varied operating applications, both INDOOR and OUTDOOR.

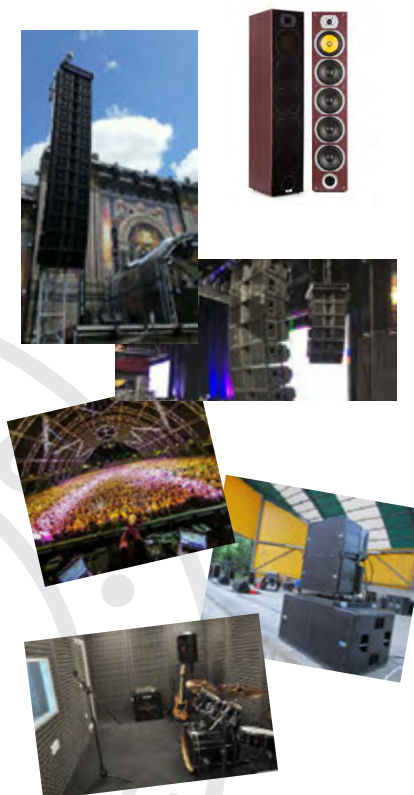

tasker®

...a project further...

NEW

Extra Flex 12G-SDI Cables for 4K Broadcast

** Production on demand

Also Available
in PUR for outdoor
heavy duty
application

		T42 PVC	** T442 PVC
APPLICATION:		12G-SDI Video 4K	Multi 12G-SDI Video 4K
INNER CABLES	n° Cond.	1	1x4
NOMINAL SECTION	mm²	1x0,88	1x0,88
CONDUCTOR FORMATION	ø mm	7x0,40 OFC	7x0,40 OFC
CORE INSULATION	ø mm	4,80 Foam PE	4,80 Foam PE
INNER SHIELD	type and coverage	Double CS Braid 89 and 86%	Double CS Braid 89 and 86%
SINGLE CORE SHEATH	ø mm		7,10 PUR Firestop® HalogenFree
SINGLE COAX SHEATH COLOR			Black or Green
OUTER SHEATH	mm	7,10 Soft PVC	21,80 Soft PVC
OUTER SHEATH COLOR		Black or Green	Black or Green
PACKAGING	m	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/Km	21,00	21,00
MAX RATED VOLTAGE	V.	49	49
IMPEDANCE	Ω	75	75
VELOCITY OF PROPAGATION	%	86	86
OPERATIVE TEMPERATURE	°C	-15/+70	-15/+70
MIN. BENDING RADIUS	Fix (O.D.) Mobile (O.D.)	8 10	8 10
Standards:		RoHS2 2011/65/UE and 2015/863UE	

Attenuation dB/100 m.

10 MHz	2,03
100 MHz	6,71
1000 MHz	22,5
2000 MHz	33,98
3000 MHz	44,96
4500 MHz	52,79
6000 MHz	70,01

Recommended Installation Distances

HD-SDI	120
3G-SDI	100
6G-SDI	70
12G-SDI	70

Connectors



NBNC75BWU13 (TN450)

Products description

Con il diffondersi delle tecnologie 6G e 12GSDI tasker ha deciso di ampliare la gamma dei modelli T42 inserendo una versione in soft PVC e un cavo multiplo a quattro conduttori.
Il **T42** è un coassiale estremamente flessibile che grazie al suo speciale dielettrico e alla doppia treccia in rame stagnato permette di lavorare, con i nuovi standard trasmissivi, a distanze di 70 metri.
Inoltre, grazie al conduttore multifilare la versione PUR è adatta non solo ad installazioni su avvolgicavo professionali per broadcast ma anche alla movimentazione in catenaria con test di efficienza eseguita a 500000 cicli con velocità e accelerazione massima rispettivamente di 3,3 m/s e 4,0 m/s².

With the spread of 6G and 12GSDI technologies, tasker decided to expand the T42 model range by introducing a version in soft PVC and a four-conductor multiple cable.
The **T42** is an extremely flexible coax that thanks to its special dielectric and the double braid in tinned copper allows working at distances of 70 meters with the new transmission standards.
Moreover, thanks to the multi-wire conductor the PUR version is suitable not only for installations on professional cable drums for broadcast but also for drag chain installation with efficiency test performed at 500000 cycles with maximum speed and acceleration respectively of 3.3 m/s and 4.0 m/s².

tasker®

...a project further...

NEW

Special 75Ω - 50Ω Cables

** Production on demand

		** C 231 L.S.Z.H.		C 538	** TR 12 PUR	RG 214U
APPLICATION:		75Ω Video Surveillance Outdoor		50Ω Low Loss for Wi-Fi and RF	50Ω Triaxial for Broadcast	50Ω Professional RF
USE:		Indoor/Outdoor		Indoor	Indoor/Outdoor	Indoor
INNER CABLE	n° Cond.	1	2	1	1	1
NOMINAL SECTION	mm²	1x0,08 CS	2x0,75 CU	1x5,50 CU	1x0,48 SPC - Silver Plated	1x3,00 SPC - Silver Plated
CONDUCTOR FORMATION	mm	7x0,12 OFC	24x0,20 OFC	7x1,00 OFC	19x0,18 OFC	7x0,75 OFC
CORE INSULATION	ø mm	1,40 PPE		7,25 Gas Expanded PE	2,95 PE	7,25 Compact PE
FIRST SHIELDING	type and coverage	CS Spiral 100%		Red Copper Foil 100%	SPC Braid 95%	SPC Braid 96%
INNER SHEATH	ø mm	2,40 PVC HT105°C	2,20 PVC		5,00 L.S.Z.H. HalogenFree FirestoP	
SECOND SHIELDING	type and coverage			CU Braid 73%	CU Braid 94%	SPC Braid 98%
OUTER SHEATH		5,50 Black L.S.Z.H. grade M1 HalogenFree FirestoP OUTDOOR USE		10,30 Black PVC	7,20 PUR HalogenFree FirestoP OUTDOOR USE	10,80 PVC
PACKAGING	m	100/300/500		100/250	100/250	100/250
CONDUCTOR RESISTANCE	Ω/Km	203,00	21,93	3,00	36,50	6,00
IMPEDANCE	Ω	75		50	50	50
MAX RATED VOLTAGE	V.		49	49	49	49
OPERATIVE TEMPERATURE	°C		-30/+70	-15/+70	-40/+80	-15/+70
ATTENUATION (dB/100mt)	50 MHz		19,7	2,6	9,7	4,5
	100 MHz		28,7	3,7	13,9	6,7
	300 MHz		51,6	6,7	25,3	12,1
	600 MHz		74,8	10,3	37,9	17,8
	1000 MHz		103,0	13,5	51,8	24,3
	3000 MHz			25,6		51,3
Standards:		RoHS2 2011/65/UE and 2015/863UE				

Products description

Nuovi cavi per la videosorveglianza con alimentazione integrata sia per installazioni indoor che outdoor. Realizzati con guaina in LSZH di grado M1, un polimero termoplastico ritardante la fiamma e a zero emissione di alogeni. Nuovi Cavi a radiofrequenza, anche con materiali nobili come il rame argentato, per installazioni professionali e broadcast. Tutti con doppia schermatura per utilizzi ad alte frequenze e lunghe distanze mantenendo basse le perdite di attenuazione. Cavi adatti sia alla posa fissa che mobile di antenne, Wi-Fi, WLAN, GPS e Mobile. Tutta la gamma è disponibile anche con guaina in PVC, PE, PUR con o senza armatura metallica per la posa interrata, anche in presenza di roditori.


New line of cables for video surveillance suitable both for indoor and outdoor installations. Cables with L.S.Z.H. sheath grade M1, a thermoplastic polymer, flame retardant and with zero halogen emission. New Radiofrequency cables, also with noble material like silver plated copper, for professional and broadcast installations. All double shielded advised to be used at high frequencies and long distances maintaining low attenuation loss. These cables are also suitable for fixed and mobile installations for antennas, Wi-Fi, WLAN, GPS and Mobile. The entire range of products is also available with PVC, PE or PUR sheath, with or without metal armor for underground installation even in presence of rodents.



Connector



NBTC75BFI4 (TN441)
(Only for C231 L.S.Z.H.)

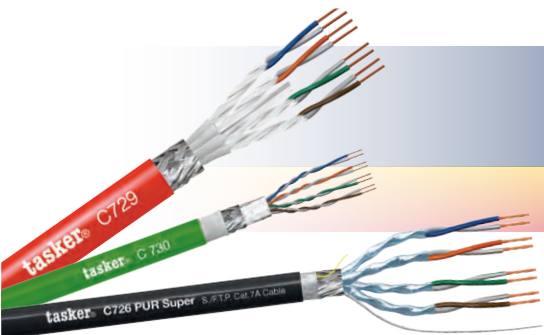

tasker®

...a project further...

NEW

Special Application LAN CABLES

** Production on demand

		C 729	** C 730	** C 726 PUR Super
TYPE:		Cat. 6 S-U.T.P.	Cat. 6A S.F. -U.T.P.	Cat. 7A S-F.T.P.
APPLICATION:		Fire Resistant 2h at 850°C	High Temperature	High Speed Connection at 1GHz/100m.
INNER CABLES	n° Cond.	8	8	8
NOMINAL SECTION	mm²	4x2x0,34 CU	4x2x0,14 CU	4x2x0,26 CU
CONDUCTOR FORMATION	mm	1x0,64	7x0,16	7x0,22
CORE INSULATION	ø mm	1,05 PE + Mineral glass tape	1,00 FEP Teflon	1,53 Foam - Skin PE
PAIRS SHIELDING	type and coverage	Glass Fiber tape 100%		Al Foil tape 100% + Drain wire
SHIELD	type and coverage	Al Foil tape 100% CS Braid 65%	Al Foil tape 100% CS Braid 80%	CS Braid 85%
OUTER SHEATH		10,20 Red LSZH HalogenFree FirestoP	5,70 Green FEP Teflon HalogenFree FirestoP OUTDOOR USE	8,70 Black PUR HalogenFree FirestoP OUTDOOR USE Aramid rip Cord
PACKAGING	m	100/300/500	100/300/500	100/300/500
CONDUCTOR RESISTANCE	Ω/100m.	59,4	138	72
IMPEDANCE	Ω	100	100	100
MAX RATED VOLTAGE	V.	49	90	49
OPERATIVE TEMPERATURE	°C	-20/+70	-90/+180	-40/+80
Standards:		RoHS2 2011/65/UE and 2015/863UE - EN50200 - IEC 60332-1-2		



Products description

Tasker ha ampliato la sua gamma di cavi LAN di categoria 6 e 7, inserendo nuovi prodotti studiati per applicazioni speciali. Il C729 è un cavo doppio schermo con isolamento speciale in fibra di vetro che lo rende resistente al fuoco diretto fino due ore (PH120). Il tasker C730 è un cavo con anime e guaina in FEP teflon, un materiale morbido ma allo stesso tempo ritardante la fiamma, privo di alogeni e resistente agli oli, ai raggi UV, agli agenti chimici e atmosferici. Tutte queste caratteristiche lo rendono un prodotto particolarmente indicato per uso esterno anche in condizioni estreme grazie alla sua temperatura operativa di -90 a +180°C. Il C726 PUR Super è il nostro primo cavo Cat.7A per la trasmissione dati di nuova generazione a 1000 MHz.

Tasker has enriched its range of LAN cables Cat. 6 and 7, inserting new products, projected for special applications. Tasker C729 is a cable with a double screen and special insulation in glass fiber, that makes this cable resistant to direct fire till two hours (PH120). Tasker C730 is a cable with cores and sheath in FEP Teflon, a very soft but also flame retardant material, without halogen and resistant to oil, UV rays, chemical and environmental agents. All these features make this product particularly advised for outdoor use, even in extreme conditions, thanks to its operative temperature from -90° up to +180°C. The C726 PUR Super is our first Cat.7A cable for next-generation 1000 MHz data transmission.



tasker®


...a project further...

NEW

Komby Cables - An Integrated Solution for any Application

** Production on demand

		** C734 Super		** C735 Super	
APPLICATION:		Integrated Systems that require Cat.7, and Power		Integrated Systems that require Cat.7, and Power	
INNER CABLES	<i>n° Cond.</i>	S./F.T.P. Cat.7	Power	2x S./F.T.P. Cat.7	Power
NUMBER OF CONDUCTORS		8	3	8x2	3
NOMINAL SECTION	mm²	4x2x0,14	3x1,50	4x2x0,14	3x2,50
CONDUCTOR FORMATION	mm	7x0,16 CU OFC	28x0,25 CU OFC	7x0,16 CU OFC	48x0,25 CU OFC
CORE INSULATION	ø mm	1,00 Foam Skin PE	2,30 PVC	1,00 Foam Skin PE	3,20 PVC
SHIELDING	type/coverage	AL Foil tape on each pair 100% + CS Braid 65%		AL Foil tape on each pair 100% + CS Braid 65%	
INNER SHEATH	mm	6,40 PVC Flame Retardant	6,20	6,30 PVC Flame Retardant	8,30 PVC Flame Retardant
TOTAL SHEATH	mm	16,50 PVC Flame Retardant		19,20 PVC Flame Retardant	
PACKAGING	m	100/300/500		100/300/500	
CONDUCTOR RESISTANCE	Ω/Km	138	12,50	138	6,41
MAX RATED VOLTAGE	V.		49		49
IMPEDANCE	Ω	100		100	
OPERATIVE TEMPERATURE	°C		-20/+70		-20/+70
Standards:	RoHS2 2011/65/UE and 2015/863UE				

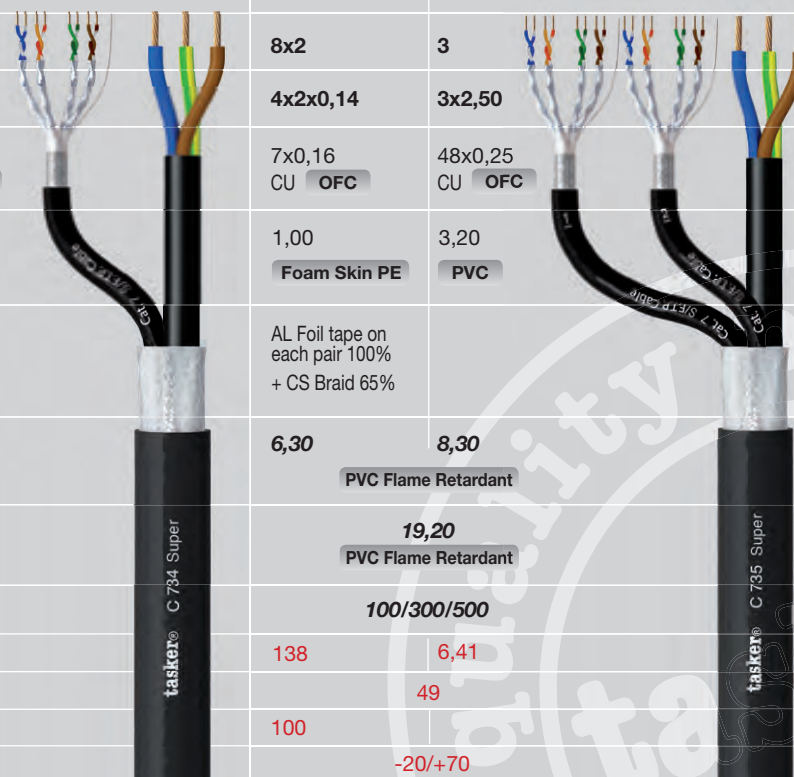

Connectors



NE8MX6
max. ø 9,5 mm.

Products description

Tasker è in grado di realizzare cavi multifunzionali custom di alta qualità, specifici per i sistemi integrati, con infinite possibili combinazioni di cavi Audio, Video, Dati e fibre ottiche. Cavi extra flessibili adatti sia per installazioni connettorizzate su avvolgicavo che per le pose fisse e mobili. Tutti i modelli sono realizzabili con guaina in **PVC extra morbido** per regie mobili o con guaina in **Poliuretano**, specifica per uso **OUTDOOR**, con o senza armatura metallica per interrimento non protetto anche in presenza di roditori.

Tasker is able to realize high quality multifunctional cables, specific for integrated systems, with endless possibilities to combine Audio, Video, Data and Optic fiber cables. We can also provide extra flexible cables suitable for both connectorized installations on cable drums and for fixed and mobile laying. All of them are realized with an **extra soft PVC** sheath, perfect for broadcast on the road or with a **PUR** sheath for an **OUTDOOR** use, with or without metallic armor for unprotected landfill and in presence of rodents too.



tasker®

...a project further...

NEW

Komby Cables - An Integrated Solution for any Application

		C743			C 747 PVC	
APPLICATION:		Integrated Systems that require Cat.7, digital Audio and Power			Multi Cat.7 for LAN Installation and Digital Audio	
INNER CABLES	n° Cond.	3x S./F.T.P. Cat.7	2x Digital Audio	Power	4x Cat.7 S./F.T.P.	
NUMBER OF CONDUCTORS		8x3	2	3	8x4	
NOMINAL SECTION	mm²	4x2x0,14	2x0,22	3x2,50	4x2x0,14	
CONDUCTOR FORMATION	mm	7x0,16 CU OFC	28x0,10 CS OFC	48x0,25 CU OFC	7x0,16 CU OFC	
CORE INSULATION	ø mm	1,00 Foam Skin PE	1,50 PPE	3,90 PVC	1,00 Foam Skin PE	
SHIELDING	Type and Coverage	AL Foil tape on each pair 100% + CS Braid 65%	CU Spiral 100% + Drain wire		AL Foil tape on each pair 100% + CS Braid 65%	
INNER SHEATH	mm	6,40	4,40		6,30	
		PVC Flame Retardant			PVC Flame Retardant	
TOTAL CABLE SHEATH	mm	20,80			19,00	
		PVC Flame Retardant			Soft PVC	
PACKAGING	m	100/300/500			100/300/500	
CONDUCTOR RESISTANCE	Ω/Km	148	79,15	6,41	138	
PAIRS CAPACITY	pF/m	47	50		44	
IMPEDANCE	Ω	100	110		100	
MAX RATED VOLTAGE	V.	49			49	
OPERATIVE TEMPERATURE	°C	-20/+70			-15/+70	
Standards:		RoHS2 2011/65/UE and 2015/863UE				
Products description		Tasker è in grado di realizzare cavi multifunzionali custom di alta qualità, specifici per i sistemi integrati, con infinite possibili combinazioni di cavi Audio, Video, Dati e fibre ottiche. Cavi extra flessibili adatti sia per installazioni connettorizzate su avvolgicavo che per le pose fisse e mobili. Tutti i modelli sono realizzabili con guaina in PVC extra morbido per regie mobili o con guaina in Poliuretano, specifica per uso OUTDOOR, con o senza armatura metallica per interramento non protetto anche in presenza di roditori.			Tasker is able to realize high quality multifunctional cables, specific for integrated systems, with endless possibilities to combine Audio, Video, Data and Optic fiber cables. We can also provide extra flexible cables suitable for both connectorized installations on cable drums and for fixed and mobile laying. All of them are realized with an extra soft PVC sheath, perfect for broadcast on the road or with a PUR sheath for an OUTDOOR use, with or without metallic armor for unprotected landfill and in presence of rodents too.	



Connectors





tasker®

...a project further...

NEW

Komby Cables - An Integrated Solution for any Application

		TSK1070 PVC		
APPLICATION:		IP Camera installation and integrated Systems that require Cat.7, 12GSDI Video and Power		
INNER CABLES	n° Cond.	1x S./F.T.P. Cat.7	12G-SDI Coax Video	Power
NUMBER OF CONDUCTORS		8	1	3
NOMINAL SECTION	mm²	4x2x0,14	1x0,88	3x1,50
CONDUCTOR FORMATION	mm	7x0,16 CU OFC	7x0,40 CU OFC	30x0,25 CU OFC
CORE INSULATION	ø mm	1,05 Foam Skin PE	4,80 Foam PE	2,50 PVC
SHIELDING	type/coverage	AL Foil tape on each pair 100% + CS Braid 65%	Double CS Braid 89% and 86%	
INNER SHEATH	mm	6,30	7,10 PVC	7,00
TOTAL SHEATH	mm	19,50 PVC		
PACKAGING	m	100/300/500		
PAIR CAPACITY	pF/m.			
CAPACITY Core/Shield	pF/m.		53,00	
CONDUCTOR RESISTANCE	Ω/Km	143	21,00	12,50
PROPAGATION VELOCITY	%		86,00	
MAX RATED VOLTAGE	V.		49	
IMPEDANCE	Ω	100	75	
OPERATIVE TEMPERATURE	°C		-20/+70	
Standards:		RoHS2 2011/65/UE and 2015/863UE		



tasker® TSK 1070 PVC



Connectors



NBNC75BWU13
max. ø 7,3 mm.

NE8MX6-B-T
max. ø 9,5 mm.

Products description

Tasker è in grado di realizzare cavi multifunzionali custom di alta qualità, specifici per i sistemi integrati, con infinite possibili combinazioni di cavi Audio, Video, Dati e fibre ottiche. Cavi extra flessibili adatti sia per installazioni connettorizzate su avvolgicavo che per le pose fisse e mobili. Tutti i modelli sono realizzabili con guaina in **PVC extra morbido** per regie mobili o con guaina in **Poliuretano**, specifica **per uso OUTDOOR**, con o senza armatura metallica per interramento non protetto anche in presenza di roditori.

Tasker is able to realize high quality multifunctional cables, specific for integrated systems, with endless possibilities to combine Audio, Video, Data and Optic fiber cables. We can also provide extra flexible cables suitable for both connectorized installations on cable drums and for fixed and mobile laying. All of them are realized with an **extra soft PVC** sheath, perfect for broadcast on the road or with a **PUR** sheath for an **OUTDOOR use**, with or without metallic armor for unprotected landfill and in presence of rodents too.






Connectors



NBNC75BWU13
max. ø 7,3 mm.




NE8MX6-B-T
max. ø 9,5 mm.


tasker



Nautical Marine Audio and Video Cables



TSK 403 CPR Cca Section: $2 \times 2,50 \text{ mm}^2$ - $\varnothing$ 8,90 mm - CPR Cca Class
Sheath: **LSZH** **CPR**




C 128 CPR Section: $2 \times 0,35 \text{ mm}^2$ - $\varnothing$ 6,10 mm - CPR Eca Class
Sheath: **CPR**



TSK 1039 PUR Section: $2 \times 0,50 \text{ mm}^2$ - $\varnothing$ 6,40 mm
Sheath: **PUR**



RGB 75 LSZH Section: $1 \times 0,08 \text{ mm}^2$ (75 Ω) - $\varnothing$ 2,8 mm
Sheath: **LSZH**



C 722 CPR B2ca Section: $4 \times 2 \times 0,25 \text{ mm}^2$ - 7,50 mm - Cat. 6 CPR B2ca Class
Sheath: **LSZH** **CPR**



C 862 Section: $2 \times 2 \times 0,35 \text{ mm}^2$ - $\varnothing$ 7,50 mm
Sheath: **PUR**




TSK 1079 CPR Cca Dimension: 1,00/4,80/6,80 mm - 75 Ω - HD SDI CPR Cca Class
Sheath: **LSZH** **CPR**



Extra Soft silicone rubber
TSK71 Section: $2 \times 0,50 \text{ mm}^2$ - Dimension 2,1x4,2 mm
TSK72 Section: $2 \times 0,75 \text{ mm}^2$ - Dimension 2,4x4,8 mm
TSK73 Section: $2 \times 1,50 \text{ mm}^2$ - Dimension 2,5x5,0 mm



TSK 402 CPR Cca Section: $2 \times 1,50 \text{ mm}^2$ - $\varnothing$ 7,80 mm - CPR Cca Class
Sheath: **LSZH** **CPR**



TSK 106 CPR Section: $2 \times 4,00 \text{ mm}^2$ - $\varnothing$ 11,00 mm - CPR Eca Class
Sheath: **CPR**



TSK 1038 LSZH Section: $2 \times 0,35 \text{ mm}^2$ - $\varnothing$ 6,30 mm
Sheath: **LSZH**



C 726 PUR Super Section: $4 \times 2 \times 0,26 \text{ mm}^2$ - 8,70 mm - Cat. 7A
Sheath: **PUR**



RG 59 CPR Dimension: 0,58/3,70/6,20 mm - 75 Ω - CPR Eca Class
Sheath: **CPR**



C 8025 CPR Section: $8 \times 0,25 \text{ mm}^2$ - $\varnothing$ 7,50 mm - CPR Eca Class
Sheath: **CPR**




C 231 LSZH Section: $1 \times 0,08$ (75 Ω) + $2 \times 0,75 \text{ mm}^2$ - $\varnothing$ 5,50 mm
Sheath: **LSZH**

- ALL PRODUCTS ARE READY ON STOCK
- ANY COLOR AND SPECIAL MATERIAL AVAILABLE ON DEMAND
- 100% MADE IN ITALY

AUDIO VIDEO RICERCA E SVILUPPO LIVE
 MP3 HOME THEATER QUALITÀ CONCERTI ISOLAMENTO
 INFORMATICA COMUNICAZIONE TASKERCABLES.COM
 NETWORK BROADCAST
 FLESSIBILITÀ CONNETTORI EVENTI MULTIMEDIA



...a project further...

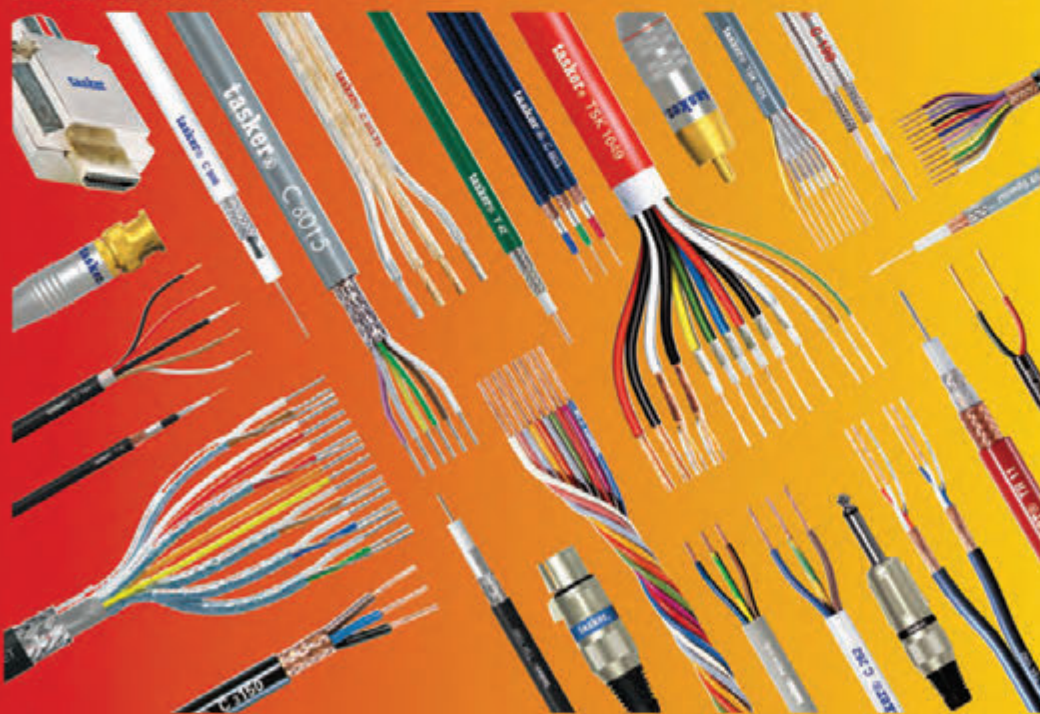

**Produzioni speciali su richiesta!
 Tutto in pronta consegna!
 Special production on demand!
 Everything on stock!**



www.tasker.it

made in Italy





tasker®

...a project further...

NEW

Studio Series

Studio Series


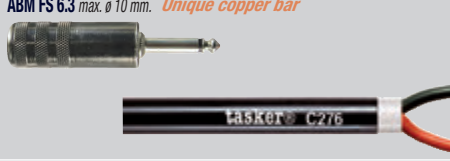
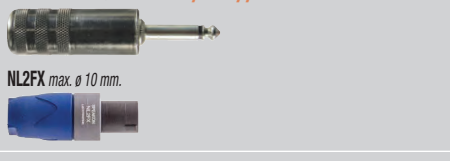
Code	Section	Lenght (m)	Description
TK146SS TK149SS TK1412SS	1x0,55mm ²	6 9 12	ABM 6.3 max. ø 7,5 mm. Unique copper bar  Cablato audio con jack mono professionale 6.3 maschio (ABM6.3) da ambo i lati. Cavo unipolare extra flessibile schermato a treccia + carbon screen con sezione 1x0,55 mm², disponibile nelle metrature da 6, 9 o 12 metri. Connettori in metallo con punta a barra unica in rame O.F.C. Both sides professional jack mono male 6.3 (ABM6.3) premade audio cable. Extra flex unipolar cable 1x0,55 mm² with braid + carbon screen shielding available in sizes of 6, 9 or 12 meters. Metal connectors with single bar tip in O.F.C. copper.
TK156SS TK159SS TK1512SS	1x0,55mm ²	6 9 12	ABM 6.3 max. ø 7,5 mm. AQM90 6.3 max. ø 7,5 mm. Unique copper bar  Cablato audio con jack mono professionale 6.3 maschio (ABM6.3) e jack mono professionale 6.3 maschio a 90° (AQM906.3). Cavo unipolare extra flessibile schermato a treccia + carbon screen con sezione 1x0,55 mm², disponibile nelle metrature da 6, 9 o 12 metri. Connettori in metallo con punta a barra unica in rame O.F.C. Professional jack mono male 6.3 (ABM6.3) to professional jack mono male 6.3 90° (AQM906.3) premade audio cable. Extra flex unipolar cable 1x0,55 mm² with braid + carbon screen shielding available in sizes of 6, 9 or 12 meters. Metal connectors with single bar tip in O.F.C. copper.
TK411-5SS TK413SS	2x2,50mm ²	1,5 3	ABM FS 6.3 max. ø 10 mm. Unique copper bar  Cablato audio con jack mono professionale 6.3 maschio (ABMFS6.3) da ambo i lati. Cavo cassa extra flessibile in doppia guaina con sezione 2x2,50 mm², disponibile nelle metrature da 1,5 o 3 metri. Connettori in metallo con punta a barra unica in rame O.F.C. Both sides professional jack mono male 6.3 (ABMFS6.3) premade audio cable. Extra flex double sheathed speaker cable 2x2,50 mm² available in sizes of 1,5 o 3 meters. Metal connectors with single bar tip in O.F.C. copper.
TK429SS TK4212SS	2x2,50mm ²	9 12	ABM FS 6.3 max. ø 10 mm. NL2FX max. ø 10 mm. Unique copper bar  Cablato audio con jack mono professionale 6.3 maschio (ABMFS6.3) e speakON Neutrik due poli 40A (NL2FX). Cavo cassa extra flessibile in doppia guaina con sezione 2x2,50 mm², disponibile nelle metrature da 9 o 12 metri. Jack in metallo con punta a barra unica in rame O.F.C. Professional jack mono male 6.3 (ABMFS6.3) to 2 pole 40A Neutrik speakON premade audio cable. Extra flex double sheathed speaker cable 2x2,50 mm² available in sizes of 9 o 12 meters. Metal jack with single bar tip in O.F.C. copper.
TK431-5SS	2x1,00mm ²	1,5	AQM90 6.3 max. ø 7,5 mm. Unique copper bar  Cablato audio con jack mono professionale 6.3 maschio a 90° (AQM906.3) da ambo i lati. Cavo cassa extra flessibile in doppia guaina con sezione 2x1,00 mm², lunghezza 1,5 metri. Connettori in metallo con punta a barra unica in rame O.F.C. Both sides professional 90° jack mono male 6.3 (AQM906.3) premade audio cable. Extra flex double sheathed speaker cable 2x1,00 mm², 1,5 meter length. Metal connectors with single bar tip in O.F.C. copper.

Caratteristiche Jack Professionali Indicati anche in ambito audio ad alta potenza come ad esempio amplificatori professionali con stadio finale a valvole, dove la variazione termica risulta non trascurabile. Ecco le caratteristiche più importanti:

- Punta a barra unica in rame O.F.C.
- Passaggio cavo consentito fino a Ø 7,50 mm
- Cucchiaino di saldatura maggiorato per ancoraggi di grande tenuta meccanica

Professional Jack features Particularly advised for high power audio application as for example professional amplifiers with valves section (stack), where the thermal variation results not negligible. Below the main features:

- Head with unique O.F.C. copper bar
- Cable step up to Ø 7,50 mm
- Increased welding spoon a good anchoring mechanical seal





tasker®



...a project further...

NEW

Premium Series

Premium Series

Code	Section	Lenght (m)	Description
TK123PSF TK126PSF TK129PSF TK1212PSF	1x0,50mm ²	3 SPM6.3GB-N max. ø 6,5 mm. 6 9 12	 Colors: - Fluo Blue - Fluo Green - Fluo Yellow - Fluo Orange - Trasparent Bronze Code: - B - V - G - A - TB Cablato audio con jack mono 6.3 maschio placcato oro (SPM6.3GB-N) da ambo i lati. Cavo unipolare extra flessibile schermato a spirale + carbon screen con sezione 1x0,50 mm², disponibile nelle metrature da 3,6, 9 o 12 metri. Both side gold plated jack mono 6.3 male (SPM6.3GB-N) premade audio cable. Extra flex unipolar cable 1x0,50 mm² with spiral + carbon screen shielding available in sizes of 3,6, 9 or 12 meters.
TK113PSF TK116PSF TK119PSF TK1112PSF	1x0,50mm ²	3 SPM90 6.3M max. ø 6,3 mm. 6 9 12	 Colors: - Fluo Blue - Fluo Green - Fluo Yellow - Fluo Orange - Trasparent Bronze Code: - B - V - G - A - TB Cablato audio con jack mono 6.3 maschio a 90° (SPM906.3M) da ambo i lati. Cavo unipolare extra flessibile schermato a spirale + carbon screen con sezione 1x0,50 mm², disponibile nelle metrature da 3,6, 9 o 12 metri. Both side 90° jack mono male 6.3 (SPM906.3M) premade audio cable. Extra flex unipolar cable 1x0,50 mm² with spiral + carbon screen shielding available in sizes of 3,6, 9 or 12 meters.
TK501PSF	1x0,50mm ²	1 SP50GRCAM-N max. ø 6 mm. 	Colors: - Fluo Blue - Fluo Green - Fluo Yellow - Fluo Orange - Trasparent Bronze Code: - B - V - G - A - TB Cablato audio con RCA maschio placcato oro (SP50GRCAM-N) da ambo i lati. Cavo unipolare extra flessibile schermato a spirale + carbon screen con sezione 1x0,50 mm², lunghezza 1 metro. Both side gold plated male RCA (SP50GRCAM-N) premade audio cable. Extra flex unipolar cable 1x0,50 mm² with spiral + carbon screen shielding, 1 meter length.
TK511PSF	1x0,50mm ²	1 SP50GRCAM-N max. ø 6 mm. SP49GRCAF-N max. ø 6 mm. 	Colors: - Fluo Blue - Fluo Green - Fluo Yellow - Fluo Orange - Trasparent Bronze Code: - B - V - G - A - TB Cablato audio RCA maschio placcato oro (SP50GRCAM-N) e RCA femmina placcato oro (SP49GRCAF-N). Cavo unipolare extra flessibile schermato a spirale + carbon screen con sezione 1x0,50 mm², lunghezza 1 metro. Gold plated male RCA (SP50GRCAM-N) to Gold plated female RCA (SP49GRCAF-N) premade audio cable. Extra flex unipolar cable 1x0,50 mm² with spiral + carbon screen shielding, 1 meter length.





tasker®



...a project further...

NEW

Premium Series

Premium Series

Code	Section	Lenght (m)	Description
TK521PSF	1x0,50mm ²	1	SP49GRCAF-N max. ø 6 mm. Colors: ● Fluo Blue ● Fluo Green ● Fluo Yellow ● Fluo Orange ● Trasparent Bronze Code: B V G A TB Cablato audio con RCA femmina placcato oro (SP49GRCAF-N) da ambo i lati. Cavo unipolare extra flessibile schermato a spirale + carbon screen con sezione 1x0,50 mm², lunghezza 1 metro. Both side gold plated female RCA (SP49GRCAF-N) premade audio cable. Extra flex unipolar cable 1x0,50 mm² with spiral + carbon screen shielding, 1 meter length.
TK223PSF TK226PSF TK229PSF TK2212PSF	2x0,22mm ²	3 6 9 12	SPM6.3GB-N max. ø 6,5 mm. SPFG3XLR-N max. ø 7 mm. Colors: ● Fluo Blue ● Fluo Green ● Fluo Yellow ● Fluo Orange ● Trasparent Bronze Code: B V G A TB Cablato audio con jack mono 6.3 maschio placcato oro (SPM6.3GB-N) e XLR 3 poli femmina placcato oro (SPFG3XLR-N). Cavo bilanciato extra flessibile 2x0,22 mm² schermato nelle metrature da 3, 6, 9, 12 metri. Gold plated jack mono male 6.3 (SPM6.3GB-N) to gold plated 3 pin female XLR (SPFG3XLR-N) premade audio cable. Extra flex shielded balanced cable 2x0,22 mm² available in sizes of 3, 6, 9, 12 meters.
TK333PSF TK336PSF TK339PSF TK3312PSF	2x0,22mm ²	3 6 9 12	SPMG3XLR-N max. ø 7 mm. SPFG3XLR-N max. ø 7 mm. Colors: ● Fluo Blue ● Fluo Green ● Fluo Yellow ● Fluo Orange ● Trasparent Bronze Code: B V G A TB Cablato con XLR 3 poli femmina placcato oro (SPFG3XLR-N) e XLR 3 poli maschio placcato oro (SPMG3XLR). Cavo bilanciato extra flessibile 2x0,22 mm² schermato nelle metrature da 3, 6, 9, 12 metri. Gold plated 3 pin female XLR (SPFG3XLR-N) to gold plated 3 pin male XLR (SPMG3XLR) premade audio cable. Extra flex shielded balanced cable 2x0,22 mm² available in sizes of 3, 6, 9, 12 meters.
TK172PSF TK173PSF	2x0,22mm ²	2 3	SP82GB3,5S-N max. ø 6,5 mm. Colors: ● Fluo Blue ● Fluo Green ● Fluo Yellow ● Fluo Orange ● Trasparent Bronze Code: B V G A TB Cablato audio con jack 3.5 stereo placcato oro (SP82GB3,5S-N) da ambo i lati. Cavo bilanciato extra flessibile 2x0,22 mm² schermato nelle metrature da 2 e 3 metri. Both side gold plated jack 3.5 stereo (SP82GB3,5S-N) premade audio cable. Extra flex shielded balanced cable 2x0,22 mm² available in sizes of 2 or 3 meters.





tasker®

...a project further...

NEW

Premade Cable drums for Heavy Duty - Audio and DMX

Audio and DMX

Code	Lenght (m)	Drum	Cable	Section	Connectors	Description	Notes
GT33DPV	50 100	GT235RM GT310RM	TSK1038 PUR	2x0,35mm ²	NC3MXX-B NC3FXX-B	   Avvolgicavo schill professionale cablato con cavo tasker TSK1038 PUR e connettori Neutrik neri per interconnettere apparati audio e luci DMX. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	 Schill professional cable drum assembled with tasker cable TSK1038 PUR and black Neutrik connectors for interconnection of Audio equipments and DMX lights. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components. Available also with Neutrik XLR 5 pin connectors NC5MXX-B and NC5FXX-B. tasker code GT35DPV.
GT33DPN	50 100	GT235SO GT310SO	TSK1038 PUR	2x0,35mm ²	NC3MD-LX-B NC3FXX-B	   Avvolgicavo schill professionale cablato con cavo tasker TSK1038 PUR e connettori Neutrik neri per interconnettere apparati audio e luci DMX. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	 Schill professional cable drum assembled with tasker cable TSK1038 PUR and black Neutrik connectors for interconnection of Audio equipments and DMX lights. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components. Available also with Neutrik XLR 5 pin connectors NC5MD-LX-B and NC5FXX-B. Tasker code GT35DPN.
GT55DPV	50 100	GT310RM GT380RM	C862	2x2X0,35mm ²	NC5MXX-B NC5FXX-B	   Avvolgicavo schill professionale cablato con cavo tasker C862 e connettori Neutrik neri per interconnettere apparati luci DMX. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	Schill professional cable drum assembled with tasker cable C862 and black Neutrik connectors for DMX lights interconnection. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.
GT55DPN	50 100	GT310SO GT380SO	C862	2x2X0,35mm ²	NC5MD-LX-B NC5FXX-B	   Avvolgicavo schill professionale cablato con cavo tasker C862 e connettori Neutrik neri per interconnettere apparati luci DMX. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	Schill professional cable drum assembled with tasker cable C862 and black Neutrik connectors for DMX lights interconnection. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.



tasker®

...a project further...

NEW

Premade Cable drums for Heavy Duty - Video

Video

Code	Lenght (m)	Drum	Cable	Section	Connectors	Description	Notes
GT42CPV	50 100	GT235RM GT310RM	T42 PUR	7x0,40/4,80/7,10 mm (1x0,88 mm ² - 75Ω)	NBNC75BWU13 NBNC75BWU13	 Avvolgicavo schill professionale cablato con cavo tasker T42 PUR e connettori Neutrik per interconnettere apparati video HD-SDI fino a 12GHz. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	 Schill professional cable drum assembled with tasker cable T42 PUR and Neutrik connectors for interconnection of HD-SDI video equipments over 12GHz. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.
GT42CPN	50 100	GT235S0 GT310S0	T42 PUR	7x0,40/4,80/7,10 mm (1x0,88 mm ² - 75Ω)	NBB75DSGB NBNC75BWU13	 Avvolgicavo schill professionale cablato con cavo tasker T42 PUR e connettori Neutrik per interconnettere apparati video HD-SDI fino a 12GHz. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	Schill professional cable drum assembled with tasker cable T42 PUR and Neutrik connectors for interconnection of HD-SDI video equipments over 12GHz. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.
GT11TPV	50 100	GT380RM GT450RM	TR11 PUR Extraflex	19x0,28/6,40/8,60/11,00 mm (1x1,17 mm ² - 75Ω)	SE1051 KE1051	 Avvolgicavo schill professionale cablato con cavo tasker TR11 PUR Extraflex e connettori Fischer per interconnettere apparati broadcast professionali. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	Schill professional cable drum assembled with tasker cable TR11 PUR Extraflex and Fischer connectors for interconnection of broadcast equipments. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.
GT11TPN	50 100	GT380S0 GT450S0	TR11 PUR Extraflex	19x0,28/6,40/8,60/11,00 mm (1x1,17 mm ² - 75Ω)	DBQ1051 SE1051	 Avvolgicavo schill professionale cablato con cavo tasker TR11 PUR Extraflex e connettori Fischer per interconnettere apparati broadcast professionali. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	Schill professional cable drum assembled with tasker cable TR11 PUR Extraflex and Fischer connectors for interconnection of broadcast equipments. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.



tasker®

...a project further...

NEW

Premade Cable drums for Heavy Duty - Cat.5e and 6A

LAN Cat.5e and 6A

Code	Lenght (m)	Drum	Cable	Section	Connectors	Description	Notes
GT25LPV	50	GT310RM	C725 PUR	4x2x0,15 mm ²	NE8MX-B NE8MX-B	 Avviticavo schill professionale cablato con cavo tasker C725 PUR e connettori Neutrik neri per interconnettere apparati audio digitali e LAN Cat.5e. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	 Schill professional cable drum assembled with tasker cable C725 PUR and black Neutrik connectors for interconnection of digital audio equipments and Cat.5e LAN. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.
	75	GT310RM					
	100	GT380RM					
GT25LPN	50	GT310SO	C725 PUR	4x2x0,15 mm ²	NE8FDP-B NE8MX-B	 Avviticavo schill professionale cablato con cavo tasker C725 PUR e connettori Neutrik neri per interconnettere apparati audio digitali e LAN Cat.5e. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	Schill professional cable drum assembled with tasker cable C725 PUR and black Neutrik connectors for interconnection of digital audio equipments and Cat.5e LAN. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.
	75	GT310SO					
	100	GT380SO					
GT28LPV	50	GT310RM	C728 PUR	4x2x0,22 mm ²	NE8MX6-B NE8MX6-B	 Avviticavo schill professionale cablato con cavo tasker C728 PUR e connettori Neutrik neri per interconnettere apparati video digitali e LAN Cat.6A. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	Schill professional cable drum assembled with tasker cable C728 PUR and black Neutrik connectors for interconnection of digital video equipments and Cat.6A LAN. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.
	75	GT380RM					
	100	GT380RM					
GT28LPN	50	GT310SO	C728 PUR	4x2x0,22 mm ²	NE8FDX-P6-B NE8MX6-B	 Avviticavo schill professionale cablato con cavo tasker C728 PUR e connettori Neutrik neri per interconnettere apparati video digitali e LAN Cat.6A. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	Schill professional cable drum assembled with tasker cable C728 PUR and black Neutrik connectors for interconnection of digital video equipments and Cat.6A LAN. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.
	75	GT380SO					
	100	GT380SO					



tasker®

...a project further...

NEW

Premade Cable drums for Heavy Duty - Cat. 7

LAN Cat. 7

Code	Length (m)	Drum	Cable	Section	Connectors	Description	Notes
GT26LPV	50	GT310RM	C726 PUR	4x2x0,14 mm ²	NE8MX6-B-T NE8MX6-B-T	 Avviticavo schill professionale cablato con cavo tasker C726 PUR e connettori Neutrik neri per interconnettere apparati LAN Cat.7 ad alta velocità. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	 Schill professional cable drum assembled with tasker cable C726 PUR and black Neutrik connectors for interconnection of high speed Cat.7 LAN. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.
	75	GT310RM					
	100	GT310RM					
GT26LPN	50	GT310S0	C726 PUR	4x2x0,14 mm ²	NE8FDX-P6-B NE8MX6-B-T	 Avviticavo schill professionale cablato con cavo tasker C726 PUR e connettori Neutrik neri per interconnettere apparati LAN Cat.7 ad alta velocità. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.	 Schill professional cable drum assembled with tasker cable C726 PUR and black Neutrik connectors for interconnection of high speed Cat.7 LAN. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.
	75	GT310S0					
	100	GT310S0					

tasker®

...a project further...

NEW

Customized Professional Heavy Duty Stageboxes and Breakout Boxs for Outdoor/ Indoor Application

Code	Dimensions	Connectors			Description
SB 258 FLPF	214x92x74 mm	   			 Stagebox con 8 connettori Neutrik XLR femmina da pannello e 2 connettori multipin Syntax da 25 contatti, uno maschio e uno femmina. Corpo in alluminio e polietilene indistruttibile per applicazioni OUTDOOR/INDOOR, personalizzabile con marcatura e numerazioni laser. Cappuccio di copertura per i connettori multipin fornibile su richiesta. Ideale per il cablaggio dei cavi multicoppia.  Stagebox with 8 female Neutrik XLR chasis connectors and 2 Syntax multipin connectors with 25 contacts one male and one female. Unbreakable aluminium and polyethylene frame for OUTDOOR/INDOOR application customizable with laser marking and numbering. Protection cap for multipin connectors available on demand. Ideal for multipair cables wiring.
SB 3712 F	214x92x94 mm	  			Stagebox con 12 connettori Neutrik XLR femmina da pannello e 1 connettore multipin Syntax maschio da 37 contatti. Corpo in alluminio e polietilene indistruttibile per applicazioni OUTDOOR/INDOOR, personalizzabile con marcatura e numerazioni laser. Cappuccio di copertura per i connettori multipin fornibile su richiesta. Ideale per il cablaggio dei cavi multicoppia. Stagebox with 12 female Neutrik XLR chasis connectors and 1 Syntax male multipin connector with 37 contacts. Unbreakable aluminium and polyethylene frame for OUTDOOR/INDOOR application customizable with laser marking and numbering. Protection cap for multipin connectors available on demand. Ideal for multipair cables wiring.
SB 3712 F12M	214x92x94 mm	   			Stagebox con connettori Neutrik XLR da pannello, 12 femmina e 12 maschio + 1 connettore multipin Syntax maschio da 37 contatti. Corpo in alluminio e polietilene indistruttibile per applicazioni OUTDOOR/INDOOR, personalizzabile con marcatura e numerazioni laser. Cappuccio di copertura per i connettori multipin fornibile su richiesta. Ideale per il cablaggio dei cavi multicoppia. Stagebox with Neutrik XLR chasis connectors, 12 female and 12 male + 1 Syntax male multipin connector with 37 contacts. Unbreakable aluminium and polyethylene frame per OUTDOOR/INDOOR application customizable with laser marking and numbering. Protection cap for multipin connectors available on demand. Ideal for multipair cables wiring.



AZIENDA
CERTIFICATA
UNI EN ISO
9001



RoHS2
2002/95/EC
2011/65/UE



tasker®

trade mark of MILAN S.r.l. a socio unico
Viale Europa, 74 20090 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158 Fax. +39 02 9039.4551

www.tasker.it

tasker®

...a project further...

NEW

Customized Professional Heavy Duty Stageboxes and Breakout Boxs for Outdoor/ Indoor Application

Code	Dimensions	Connectors			Description
SB 258 FLPF	214x92x74 mm	   			 Stagebox con 8 connettori Neutrik XLR femmina da pannello e 2 connettori multipin Syntax da 25 contatti, uno maschio e uno femmina. Corpo in alluminio e polietilene indistruttibile per applicazioni OUTDOOR/INDOOR, personalizzabile con marcatura e numerazioni laser. Cappuccio di copertura per i connettori multipin fornibile su richiesta. Ideale per il cablaggio dei cavi multicoppia.  Stagebox with 8 female Neutrik XLR chasis connectors and 2 Syntax multipin connectors with 25 contacts one male and one female. Unbreakable aluminium and polyethylene frame for OUTDOOR/INDOOR application customizable with laser marking and numbering. Protection cap for multipin connectors available on demand. Ideal for multipair cables wiring.
SB 3712 F	214x92x94 mm	  			Stagebox con 12 connettori Neutrik XLR femmina da pannello e 1 connettore multipin Syntax maschio da 37 contatti. Corpo in alluminio e polietilene indistruttibile per applicazioni OUTDOOR/INDOOR, personalizzabile con marcatura e numerazioni laser. Cappuccio di copertura per i connettori multipin fornibile su richiesta. Ideale per il cablaggio dei cavi multicoppia. Stagebox with 12 female Neutrik XLR chasis connectors and 1 Syntax male multipin connector with 37 contacts. Unbreakable aluminium and polyethylene frame for OUTDOOR/INDOOR application customizable with laser marking and numbering. Protection cap for multipin connectors available on demand. Ideal for multipair cables wiring.
SB 3712 F12M	214x92x94 mm	   			Stagebox con connettori Neutrik XLR da pannello, 12 femmina e 12 maschio + 1 connettore multipin Syntax maschio da 37 contatti. Corpo in alluminio e polietilene indistruttibile per applicazioni OUTDOOR/INDOOR, personalizzabile con marcatura e numerazioni laser. Cappuccio di copertura per i connettori multipin fornibile su richiesta. Ideale per il cablaggio dei cavi multicoppia. Stagebox with Neutrik XLR chasis connectors, 12 female and 12 male + 1 Syntax male multipin connector with 37 contacts. Unbreakable aluminium and polyethylene frame per OUTDOOR/INDOOR application customizable with laser marking and numbering. Protection cap for multipin connectors available on demand. Ideal for multipair cables wiring.



AZIENDA
CERTIFICATA
UNI EN ISO
9001



RoHS2
2002/95/EC
2011/65/UE



tasker®

trade mark of MILAN S.r.l. a socio unico
Viale Europa, 74 20090 Cusago (MI) Italy
Tel. +39 02 9039.4556 - 4158 Fax. +39 02 9039.4551

www.tasker.it

tasker®

...a project further...

NEW

New Special Accessories: Shrink tubes, Sleeves, Tape and Ties

1m heat - Shrink tubes 2:1

Code	Lenght (m)	Inner Diam. at delivery (mm)	Max Inner Diam. after heasting (mm)	Packaging (pc.)	Standard Colors		Colors on demand		Description	
GTM1206		1	1,2	0,6	50	Colors:	Code:	Colors:	Code:	 Shrink tube in cross-linked polyolefin with shrinkage factor of 2:1. Flame retardant with operative temperature of -55/+125°C. UL/CSA Standard. Ideal for audio and video wiring thanks to its extreme operational versatility.
GTM1608		1	1,6	0,8	50	● Black	BK	● Violet	V	
GTM2412		1	2,4	1,2	50	● Blue	B	● Brown	BR	
GTM3216		1	3,2	1,6	50	● White	W	● Grey	GY	
GTM4824		1	4,8	2,4	50	● Red	R	● Green	G	
GTM6432		1	6,4	3,2	50	● Transparent	TR	● Yellow	Y	
GTM9548		1	9,5	4,8	50			● Orange	O	
GTM1264		1	12,7	6,4	25					
GTM1680		1	16,0	8,0	25					
GTM1995		1	19,0	9,5	25					
GTM2512		1	25,4	12,7	25					
GTM32016		1	32,0	16,0	10					
GTM3819		1	38,1	19,0	10					
GTM5025	1	50,8	25,4	5						

Heat - Shrink tubes 2:1 on Boxes

BOX1206	1,2	0,6	10	Colors: ● Black	Code: BK	Colors: ● Violet ● Brown ● Green ● Blue ● White ● Red ● Yellow	Code: V BR G B W R Y	Guaina termorestringente in polietilene reticolata con fattore di restringimento 2:1. Ritardante la fiamma con temperatura operativa di -55/+125°C. UL/CSA Standard. Ideale per la realizzazione di cablati audio e video grazie alla sua estrema versatilità operativa.	Shrink tube in cross-linked polyolefin with shrinkage factor of 2:1. Flame retardant with operative temperature of -55/+125°C. UL/CSA Standard. Ideal for audio and video wiring thanks to its extreme operational versatility.
BOX1608	1,6	0,8	10						
BOX2412	2,4	1,2	10						
BOX3216	3,2	1,6	10						
BOX4824	4,8	2,4	10						
BOX6432	6,4	3,2	5						
BOX9548	9,5	4,8	5						
BOX1264	12,7	6,4	5						
BOX1680	16,0	8,0	5						
BOX1995	19,0	9,5	5						
BOX2512	25,4	12,7	5						



Heat - Shrink tubes 2:1 on Reels

GTB1206	1,2	0,6	150	Colors: ● Black ● Blue ● White ● Red ● Transparent	Code: BK B W R TR	Colors: ● Violet ● Brown ● Grey ● Green ● Yellow ● Orange	Code: V BR GY G Y O	Guaina termorestringente in polietilene reticolata con fattore di restringimento 2:1. Ritardante la fiamma con temperatura operativa di -55/+125°C. UL/CSA Standard. Ideale per la realizzazione di cablati audio e video grazie alla sua estrema versatilità operativa.	Shrink tube in cross-linked polyolefin with shrinkage factor of 2:1. Flame retardant with operative temperature of -55/+125°C. UL/CSA Standard. Ideal for audio and video wiring thanks to its extreme operational versatility.
GTB1608	1,6	0,8	150						
GTB2412	2,4	1,2	150						
GTB3216	3,2	1,6	150						
GTB4824	4,8	2,4	75						
GTB6432	6,4	3,2	75						
GTB9548	9,5	4,8	75						
GTB1264	12,7	6,4	50						
GTB1680	16,0	8,0	50						
GTB1995	19,0	9,5	30						
GTB2512	25,4	12,7	30						
GTB32016	32,0	16,0	30						
GTB3819	38,1	19,0	30						
GTB5025	50,8	25,4	30						
GTB7638	76,2	38,1	15						
GTB10250	102,0	50,8	15						
GTB12663	126,0	63,5	15						
GTB15076	150,0	76,0	15						



tasker®

...a project further...

NEW

New Special Accessories: Shrink tubes, Sleeves, Tape and Ties

Braided Sleeves

Code		Inner Diam. at delivery (mm)	Max. Diam. (mm)	Packaging (m)	Standard Colors		Description	
CTR8		8,0	14,0	100	 Black	Code: BK	  Calza trecciata in monofilamento di poliestere con resistenza alla trazione di 7000 kg/cm² e temperatura operativa di -50/+150°C. Ideale per contenere più cavi in un unico fascio o per la protezione di cablati.	 Monofilament polyester braided sleeve with tensile strength of 7000 kg/cm² and operating temperature of -50/+150°C. Ideal for holding multiple cables in a single bundle or for wired protection.
CTR10		10,0	18,0	100				
CTR12		12,0	21,0	100				
CTR15		15,0	25,0	100				
CTR20		20,0	29,0	100				
CTR25		25,0	36,0	100				
CTR30		30,0	45,0	100				
CTR40		40,0	64,0	100				
CTR50		50,0	75,0	100				

Spiral Sleeves

CSP8		8,5	60,0	10	Colors:	Code:	Calza a spirale in polietilene con temperatura operativa di -50/+85°C. Ideale per contenere più cavi in un unico fascio o per la protezione di cablati. Polyethylene spiral sleeves in with an operating temperature of -50/+85°C. Ideal for holding multiple cables in a single bundle or for wired protection.
CSP10		10,2	65,0	10	 Black  Natural	BK	
CSP13		13,0	70,0	10		NAT	
CSP16		16,4	100,0	10			

Velcro Tape

Code		Diam. (mm)	Packaging (m)	Standard Colors	Description
VEL12		12	25	Colors:	Nastro in velcro ad alta resistenza ideale per la realizzazione di cablati per le più svariate applicazioni operative. High resistance velcro tape ideal for the realization of premade cables for the most varied operative applications.
VEL20		20	25	 Black Code: BK	

tasker®

...a project further...

NEW

New Special Accessories: Shrink tubes, Sleeves, Tape and Ties

Cable Ties

Code	Lenght (mm)	Width (mm)	Max tightening Diam. (mm)	Weight hold (Kg)	Packaging (pc.)	Standard Colors	Colors on demand	Description
FST8024	80,0	2,4	15,0	8,0	100	Colors: Black	Code: BK	Fascette in Nylon resistenti ai raggi UV e con temperatura operativa di -40/+85°C. Autoestinguenti entro 30 sec. dall'incendio e Certificate UL, ideali per le più svariate applicazioni operative.
FST10025	100,0	2,5	22,0	8,1	100	Natural	NAT	
FST12025	120,0	2,5	30,0	8,1	100			
FST14025	140,0	2,5	33,0	8,1	100			
FST16025	160,0	2,5	40,0	8,1	100			
FST20025	200,0	2,5	53,0	8,1	100			
FST14036	140,0	3,6	33,0	18,2	100			
FST20036	200,0	3,6	53,0	18,2	100			
FST30036	300,0	3,6	76,0	18,2	100			
FST37036	370,0	3,6	102,0	18,2	100			
FST16048	160,0	4,8	38,0	22,2	100			
FST19048	190	4,8	46,0	22,2	100			
FST20048	200	4,8	50,0	22,2	100			
FST25048	250	4,8	60,0	22,2	100			
FST28048	280	4,8	70,0	22,2	100			
FST30048	300	4,8	76,0	22,2	100			
FST37048	370	4,8	102,0	22,2	100			
FST43048	430	4,8	110,0	22,2	100			
FST53048	530	4,8	140,0	22,2	100			

Nylon cable ties, UV rays resistant with operating temperatures of -40/+85°C. Self-extinguishing within 30 sec. and UL certified. Suitable for different application.

Adhesive bases for Cable Ties

Code	Racomanded ties width (mm)	Lenght (mm)	High (mm)	Housing thickness (mm)	Hole Diam. (mm)	Packaging (pc.)	Standard Colors	Description
BAD2,5	2,5	12,7	3,2	3,2	-	100	Colors: Black	Basette adesive in Nylon per fascette con temperatura operativa di -40/+85°C. Autoestinguenti entro 30sec. dall'incendio e Certificate UL, ideali per le più svariate applicazioni operative.
BAD3,6	3,6	19,0	4,4	4,0	3,5	100	Natural	
BAD4,8	4,8	27,7	5,7	5,3	5,7	100		

Nylon adhesive bases for cable ties, with operating temperatures of -40/+85°C. Self-extinguishing within 30 sec. and UL Certified. Suitable for different application.

Saddle support for Cable Ties

Code	Racomanded ties width (mm)	Lenght (mm)	Width (mm)	High (mm)	Hole Diam. (mm)	Packaging (pc.)	Standard Colors	Description
BSL3,7	4,8	14,9	9,5	7,2	3,7	100	Colors: Black	Supporti a sella in Nylon per fascette con temperatura operativa di -40/+85°C. Autoestinguenti entro 30 sec. dall'incendio e Certificate UL, ideali per le più svariate applicazioni operative.
BSL4,5	4,8	14,9	9,5	7,2	4,5	100	Natural	

Nylon saddle support for cable ties, with operating temperatures of -40/+85°C. Self-extinguishing within 30 sec. and UL Certified. Suitable for different application.

Tools for Cable Ties

TFT1		Tira-fascette in metallo rosso per spessori fino a 4,8 mm con taglio automatico a fine regolazione.	Red metal Tie gun for thicknesses up to 4.8 mm with automatic cutting at the end of the adjustment.	TFT114		Tira-fascette in metallo rosso per spessori da 3,6 a 9,5 mm, con leva per il taglio manuale della fascetta a fine regolazione.	Red metal Tie gun for thicknesses from 3.6 to 9.5, with lever for manual cutting at the end of the adjustment.
------	--	---	---	--------	--	--	--

tasker®

