

MILAN S.r.l. a socio unico

**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com


**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it



## Technical Datasheet

# tasker® TSK 1060 Super – UL Style 20276

## HDMI 2.0 Cable with Ethernet 3D 4K

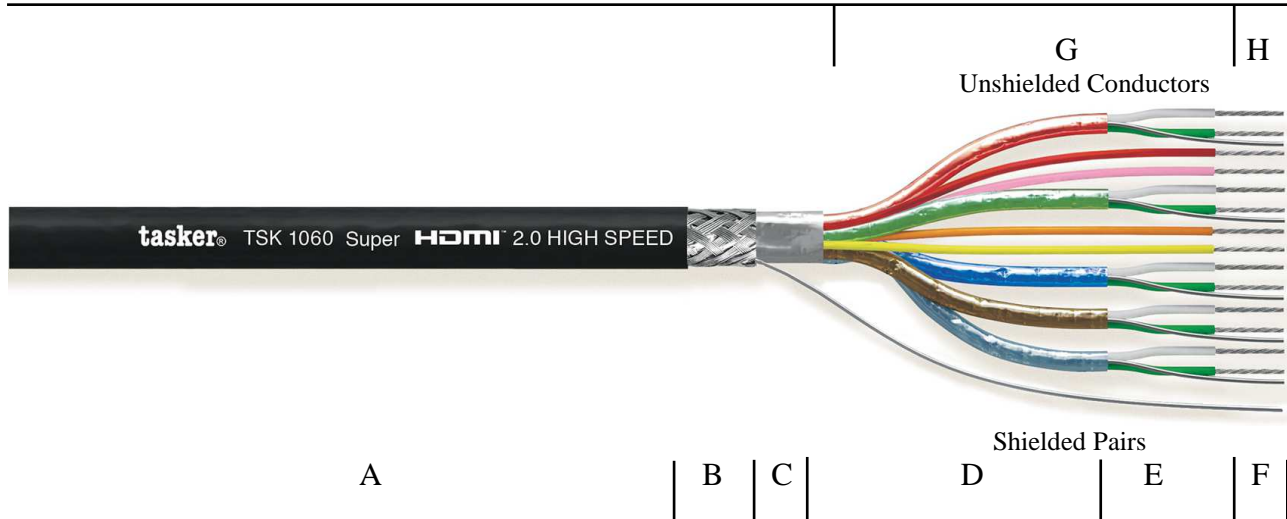

**CATEGORY** HDMI Cable (See Audio Catalogue)  
**APPLICATIONS** High definition video transmission with Ethernet on HDMI 2.0 protocol

- A:** Black Soft PVC Sheath – Outer Diam. Ø 8,50 (±0,20) mm.
- B:** First Shield on the grouping in O.F.C. tinned copper Braid covering 80%.  
+ tinned Copper drain Wire.
- C:** Second Shield on grouping in aluminum/Mylar tape covering 125%.

### Shielded Pairs

- D:** The pairs are shielded with colored aluminum/Mylar tape covering 100% + tinned copper Drain Wire.  
Color of the tape: Red, Green, Blue, Brown e Silver.
- E:** Core insulated in foam PE smooth finished (skin).  
Colored one green and one white. Diam. Ø 1,30 (±0,20) mm.
- F:** Stranded O.F.C. tinned copper formation 7x0,16 mm.  
Nom section 5x2x0,14 mm<sup>2</sup>.

### Unshielded Conductors

- G:** The 4 unshielded conductors are insulated with HDPE.  
Diam. Ø 0.90 (±0,20) mm.  
Insulation colors: Red, Pink, Orange and Yellow.
- H:** All unshielded conductors are made of O.F.C. tinned copper,  
formation of 7x0,16 mm. – Nom. sections 4x0,14 mm<sup>2</sup>.



MILAN S.r.l. a socio unico

**Head Office – Export department:** **Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa, 74 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158 T. +39 02 9039.0037-0059  
 F. +39 02 9039.4551 F. +39 02 9039.0049  
 www.taskercables.com www.tasker.it

**MARKING**

**tasker® TSK 1060 Super HIGH SPEED HDMI® 2.0 With Ethernet • DOUBLE SHIELDING**  
 • Sect. (5x2) +4x26AWG E324540 9U AWM STYLE 20276 80° 30V. VW - 1

**CUSTOM PRODUCTION**

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

**Cable Properties**

<b>Conductors Resistance</b>	138 Ω/km
<b>Impedance</b>	100 Ω
<b>Max Rated Voltage</b>	30 V
<b>Operative Temperature</b>	-15+70°C

**Attenuation dB/10mt.**

From 1,0 to 825,0 MHz	5,0
From 825 to 2.475 MHz	12,0
From 2475 to 4125 MHz	20,0
From 4125 to 5,100 MHz	25,0

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>	<b>X</b>	Outdoor Limited	Esterno Limitato	<b>Posa</b>	<b>X</b>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<b>X</b>	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			